Publication No. SS-3439
6/95

SITE SPECIFICATIONS

for the

KODAK Automixer II Plus

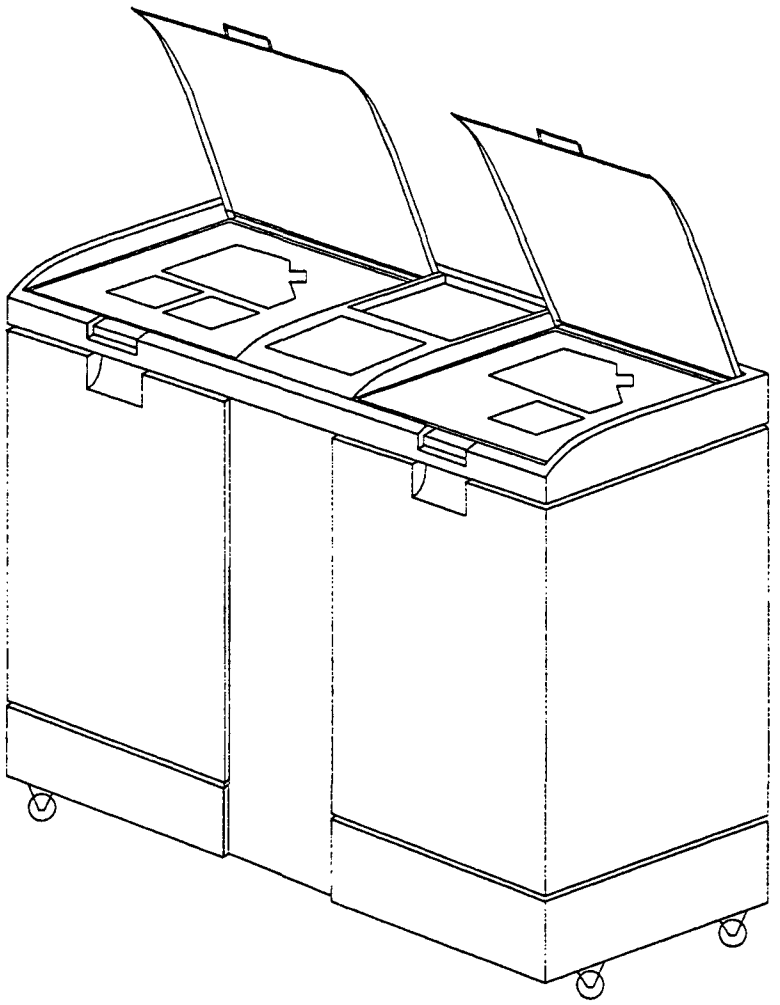

© KODAK AG STUTTGART, 1995

PLEASE NOTE

The information contained herein is based on the experience and knowledge relating to the subject matter gained by Eastman Kodak Company prior to publication.

No patent license is granted by this information.

Eastman Kodak Company reserves the right to change this information without notice, and makes no warranty, express or implied, with respect to this information. Kodak shall not be liable for any loss or damage, including consequential or special damages, resulting from the use of this information, even if loss or damage is caused by Kodak's negligence or other fault.

TABLE OF CONTENTS

Page

DATA 4

DIMENSIONS 5

DATA for Site Specifications Automixer II Plus

Weight

Weight empty	40 kg (88.2 lb)
Weight filled	155 kg (341.7 lb)

Electrical

Voltages	100 V~ +/- 10%	50/60 Hz
	115 V~ +/- 10%	50/60 Hz,
	220 V~ +/- 10%	50/60 Hz
	230 V~ +/- 10%	50/60 Hz

Power consumption:	max. 0.9 A @ 220 V	Fuse 1.25 A slow blow
	max. 1.5 A @ 115 V	Fuse 2.5 A slow blow

Power connection: IEC Cold Equipment Connector

Water

Male Thread	G 3/4"
Pressure:	1 - 6 bar (14 - 86 PSI)
Temperature:	5 - 32° C (41 - 89° F)

Tubing Sizes

Drain:	20 mm diameter (3/4")
Developer replenisher:	12 mm diameter (1/2")
Fixer replenisher:	12 mm diameter (1/2")
Manual valve outlet:	12 mm diameter (1/2")

Chemicals

KODAK RP and RA Chemistry in current US "unitized" cartridges
or European packaging.

Filling level

Normal 40l (10 US gallons) Optional 20 l (5 US gallons)

Sound level

Stand-by	< 40 dB (A)
Operation (rinse pumps)	< 70 dB (A)

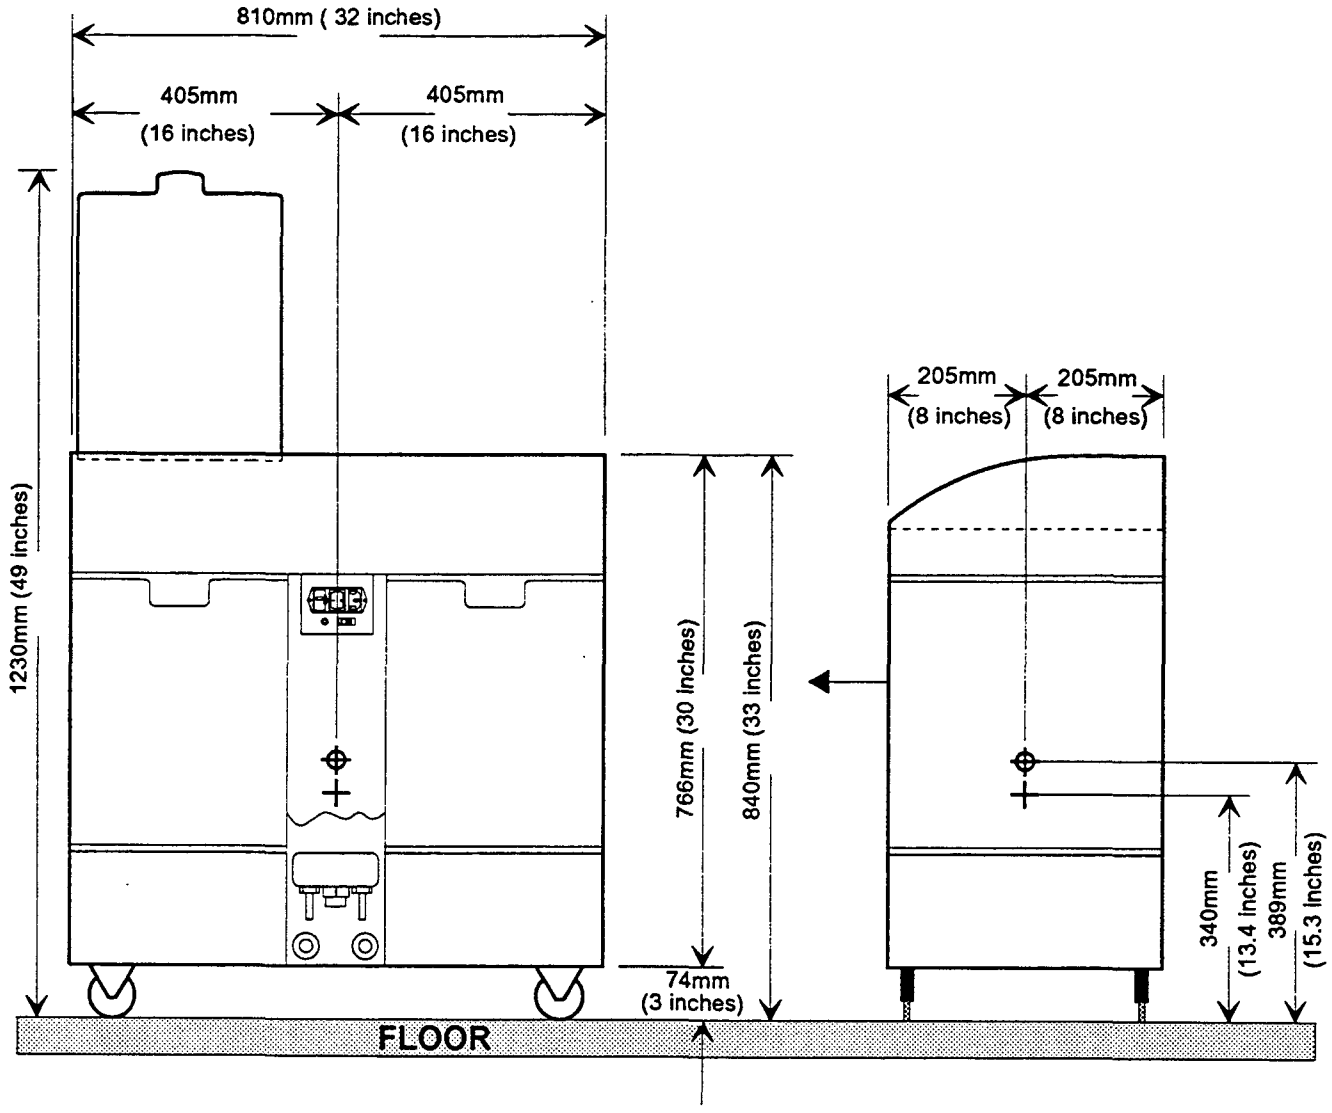

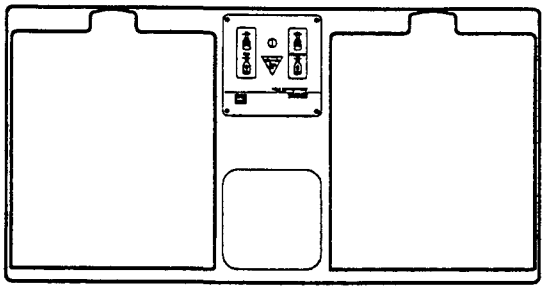

Center of Gravity

⊕ Automixer II Plus empty

+ Automixer II Plus filled with Chemicals 40L (10 US gallons) solution each tank. Holding tanks completely full.

CUSTOMER EQUIPMENT SERVICES KODAK AG STUTTGART GERMANY